








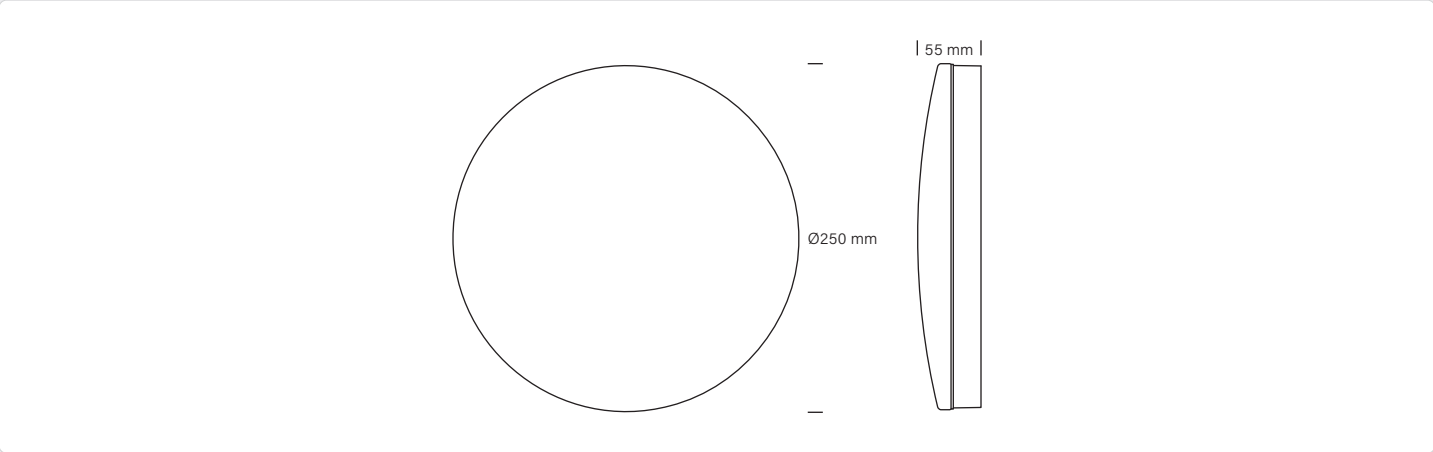

200-240 VAC

12W

LED

DRIVER

3000K
4000K
5000K

900 /
1050 /
1000
Lumen

CRI>80

30000

TE








100°

IP54


CE

RoHS

This product contains a light source in energy efficiency class

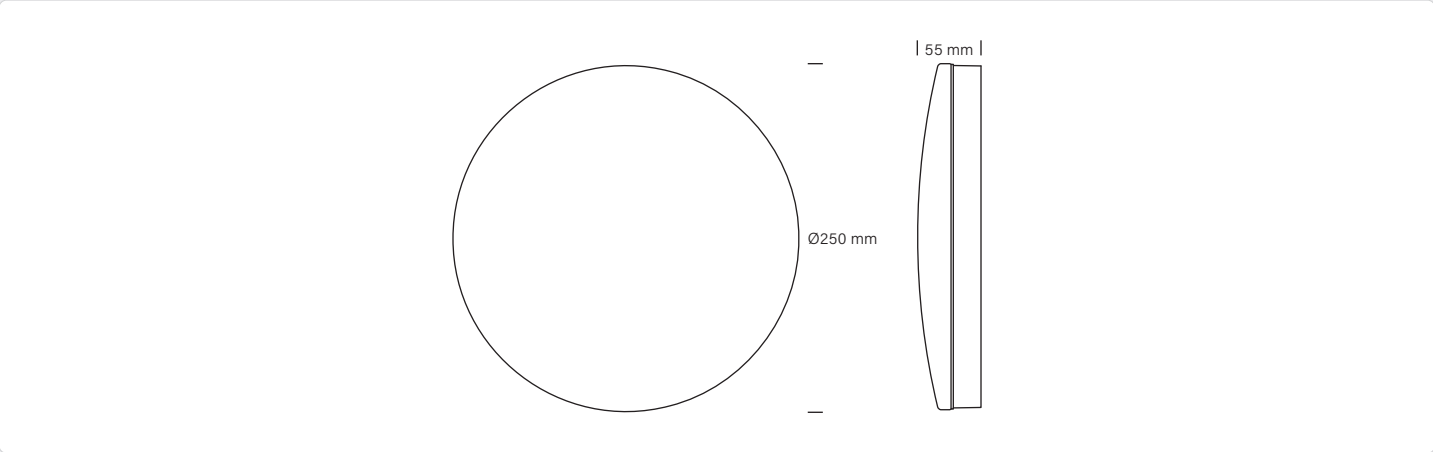

Adjust the sensor combinations by using the DIP Switches as indicated below

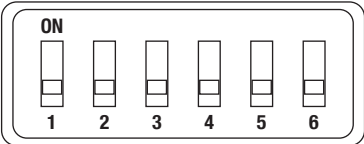

Detection range		
	1	2
3-4 m	ON	ON
2-3 m	OFF	ON
1-2 m	ON	OFF
Always on	OFF	OFF

Timer setting		
Brightness 100% / 20%*	3	4
30 s / 30 s	ON	ON
3 min / 3 min	OFF	ON
5 min / 5 min	ON	OFF
10 min / 10 min	OFF	OFF

Lux setting		
	5	6
<10 lux	ON	ON
<30 lux	OFF	ON
<50 lux	ON	OFF
Always off	OFF	OFF

*If there is no detection, dimming will be activated.

200-240 VAC

12W

3000K4000K5000K

ON

900 / 1050 / 1000 Lumen

CRI>80

1-4 m

12

192

RoHS